



Model # AAGH970
Assembly & Setup and Teardown Instructions
Layout Field Blind
Dimensions (81L x 36W x 18H)

AAGH970



All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com


Made in China

WARNING!

- **FOR YOUR SAFETY BE SURE TO READ ALL INSTRUCTIONS CAREFULLY.**
- **THIS HUNTING BLIND USES FIRE RESISTENT MATERIAL, THIS MATERIAL IS NOT FLAME PROOF.**
- **DO NOT ALLOW ANY HEAT OR OPEN FLAMES TO COME IN CONTACT WITH THE MATERIAL OF THIS HUNTING BLIND.**
- **DO NOT USE A HEATER IN BLIND. UNVENTED FUMES CAN CAUSE SICKNESS OR DEATH.**
- **DO NOT SHOOT A FIREARM THROUGH THE SCREENS, THE MUZZLE FLASH COULD IGNITE THE SCREEN MATERIAL**
- **DO NOT ALLOW CHILDREN TO PLAY WITH THIS BLIND WITHOUT ADULT SUPERVISION.**
- **NEVER COVER YOUR FACE WITH THE BLIND MATERIAL. IT CAN CAUSE SUFFOCATION AND DEATH.**

CARTON CONTENTS: AAGH970

1	Back Pack Straps	Part# 560
1	Sling Seat	Part# 561
1	U-shaped padded headrest tube	Part# 562
1	AAGH970 Polyester Cover	Part# 563
1	AAGH970 Tube Frame	Part# 564

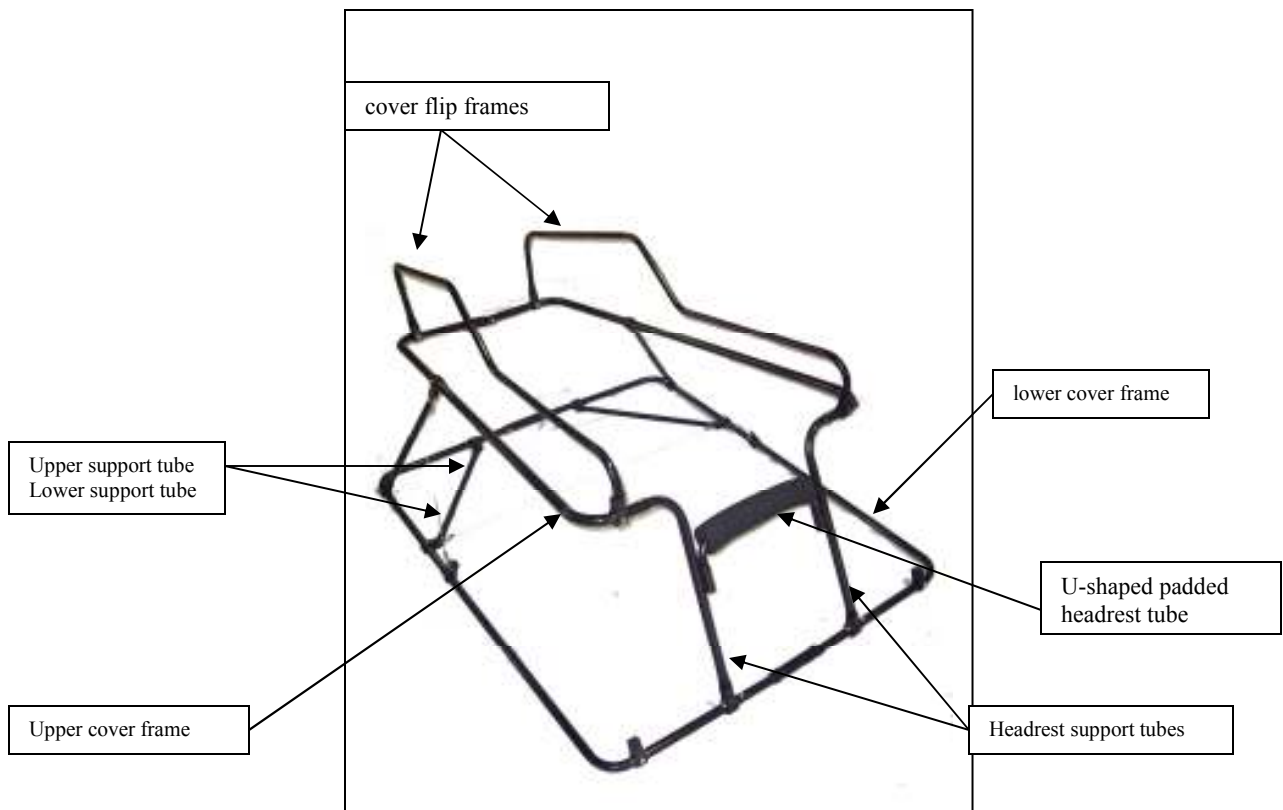

All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com Made in China

SET UP

Step 1

- Place the backpack ready layout field blind on the ground, release the Velcro strap and unfold the blind.
- Unfold the layout field blind to its full length. Refer to pictures 1 and 2.



Step 2

- Lift up the upper cover frame and insert the upper side support tube into the bottom side support tube. The push buttons should snap into place at the desired height elongated holes on the bottom side support tube. Refer to pictures 3 and 4.
- Repeat by inserting the upper side support tube into the lower side support tube on the opposite side. The push buttons should snap into place at the desired height elongated holes on the bottom side support tube. Refer to pictures 3 and 4.



All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com

Made in China

Step 3

- Insert the two headrest support tubes into the upper cover frame tubes. The push buttons should snap into place at the elongated holes on the headrest support tubes. Refer to pictures 5 and 6.
- Insert the U-shaped padded headrest tube into the headrest support tubes. The push buttons should snap into place at the elongated holes on the headrest support tubes. Refer to picture 7.
- Pull the Camo Cover tightly over headrest support tubes so that they are totally concealed. Refer to picture 8.



5



7



6



8

Step 4

- Wrap the two sling seat support straps around the U-shaped padded headrest tube, and the lower cover frame. Adjust the sling seat to your comfort. Refer to picture 9.
- Secure the Velcro strip on the top of the sling seat and the cover at the U-shaped padded headrest tube. Refer to picture 9.

ALWAYS: PRACTICE SET-UP AND TAKEDOWN SEVERAL TIMES BEFORE HUNTING FROM YOUR LAYOUT FIELD BLIND

9



All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com

Made in China

Tear-down

IMPORTANT! DO NOT store your layout field blind if it is wet or damp when you fold it in the field. To prevent mold and mildew, make sure to open it and allow it to dry naturally.

STEP 1

- Remove any natural vegetation and all gear from the blind that could keep the blind from folding correctly.
- To prevent any binding, separate the Velcro straps from the rear of headrest support arms so that the 90-degree bends of the tubes are exposed.
- Separate the Velcro strip on the top of the sling seat and the cover behind the U-shaped padded headrest. Refer to pictures 10 and 11.



10




11

Step 3

- Depress the push buttons of the U-shaped padded headrest tube at the elongated holes on the headrest support tubes. Remove the U-shaped padded headrest tube and sling seat. Refer to picture 12.
- To disassemble the Upper Frame and the two headrest support tubes, depress the spring buttons and remove the two headrest support tubes from the upper frame. Allow the two headrest support tubes to drop forward and lay flat on the bottom of the blind. Refer to pictures 13 and 14.



12

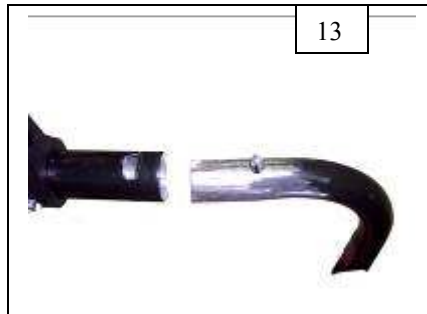

13



14



All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com

Made in China

Step 4

- Lift up the upper cover frame and depress the spring buttons and remove the two upper side support tubes from the bottom side support tube. Refer to pictures 15 and 16.
- Repeat by removing the upper side support tube from the lower side support tube on the opposite side



Step 2

- To fold the layout field blind without binding, place the sling seat and U-shaped padded headrest tube on the floor either left or right of the centerline.
- With the cover flip frames closed, fold together the upper and lower cover frames making the blind as flat as possible. Fold the lower blind over the blind cover frame. Refer to pictures 17 and 18.
- Fold the frame in half, secure the two halves together using the Velcro strap. Refer to pictures 19 and 20.



All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com

Made in China

Using and Care of Your Layout Field Blind

IMPORTANT! DO NOT store your layout field blind if it is wet or damp when you fold it in the field. To prevent mold and mildew, make sure to open it and allow it to dry naturally.

Using natural cover to brush in your layout field blind.

The key to your hunting success after you reach your hunting location is matching the surrounding vegetation. Gather a good supply of natural vegetation located in the surrounding area (hunting in a cut cornfield, you will gather cornstalks, cut barley, wheat, bean field, you will use the correct stubble, etc.) insert handfuls of this vegetation into the brush straps. You will need to fill every brush strap. Test the cover frame to make sure they will open easily.

Getting a lower profile

Dig a 6"-8" deep hole large enough for the frame portion of the blind. Using the dirt from the hole blend the blind into the ground and REMEMBER TO ASK THE LANDOWNER BEFORE YOU DIG AND ALWAYS REPLACE THE DIRT WHEN YOUR HUNT IS OVER

The padded sling seat can be adjusted by simply sliding the webbing seat straps until the seat is most comfortable for sitting and shooting.

The flagging openings are angled to provide the most natural wrist, arm and shoulder motion while flagging. Keep the flagging opening closed when not in use.

The cover flaps mesh screens are designed to eliminate any bird spooking glare from the hunters face in low light or brightly lit situations. The cover flap mesh screen can to fold under and out of your line of sight. It is recommended that you use the cover flap mesh screens whenever possible.

CLEAN UP

Unzip the end of the layout blind, raise the frame end of the blind and brush all stubble and trash out of the blind. The interior can be cleaned with a wet rag, and the exterior cover can be sprayed clean with a water hose.

IMPORTANT! DO NOT store your layout field blind if it is wet or damp when you fold it in the field. To prevent mold and mildew, make sure to open it and allow it to dry naturally.



All About Game, Inc.
8915 N. Pioneer Road • Peoria, IL 61615 • USA
(309) 691-2930 • www.allaboutgame.com

Made in China